



GEAR COUPLINGS AND SPINDLES FOR ROLLING MILL




PRODUCTS

■ Gear tooth materials and heat treatments:

- Alloy Steel > Hardened and tempered
 - > High depth gas nitriding
 - > Case hardened and tempered

■ Size: Ø up to 1500 mm

Gear Spindles

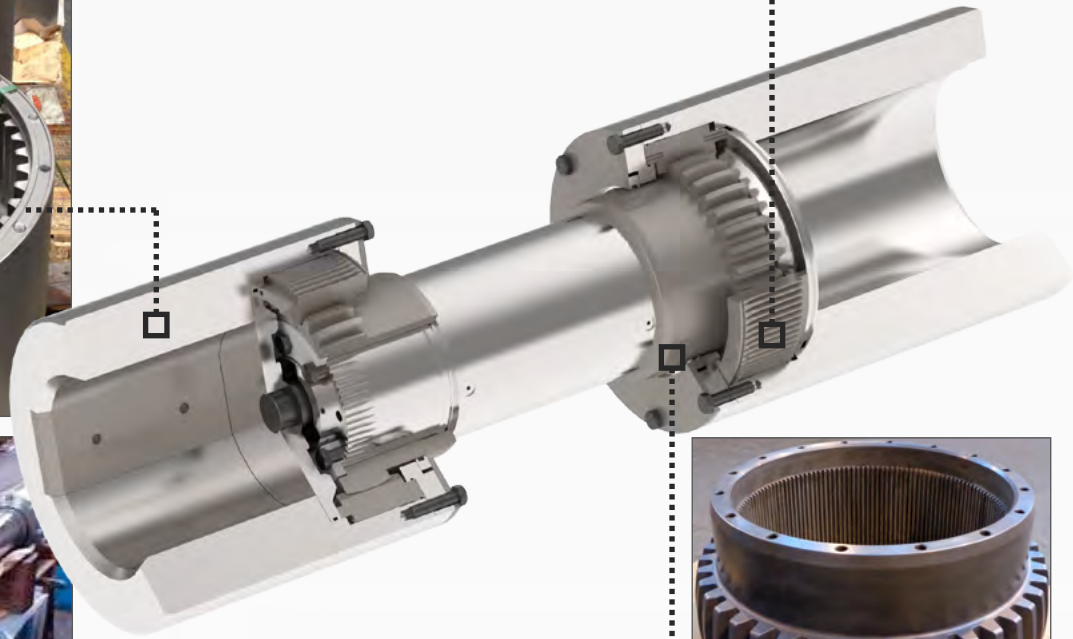

Large gear couplings




MANUFACTURING

Grinding

(Internal and external tooth grinding)



Gear grinding NILES ZP15

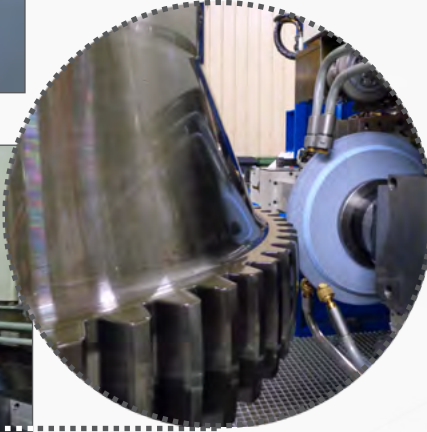

Gleason Pfauter P 2400 G


3D Gear Checker



PNC 260



Service

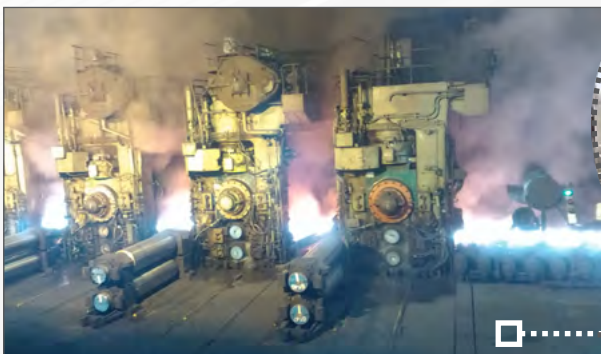

Customer benefits

*Improved
lifetime*

*High
performance
couplings*

*High
Quality*

*Erection
on site*

RANGE OF COUPLINGS

Flexident Z

Flexident Z according to French steel industry standard (S45604-A)



Other couplings

Flexident Senior



Flexacier T



couplings@cmdgears.com
Tél. : +33 (0)1 34 63 12 24
www.cmdcouplings.com